

Guarri Pipe Sealant 543

☆ General information

Guarri anaerobic adhesive and sealants are advanced materials with single component and solvent free feature. The products are specifically formulated for sealing, retaining, locking and bonding of metal or metal plated assemblies.

Anaerobic adhesives are stable when in contact with oxygen in air. As the product is placed between two mating metallic surfaces, where oxygen contact vanished, polymerization starts and forms strong, vibration and pressure proof polymer layer.

📄 Product description

Guarri Pipe Sealant 543 is a medium viscosity and medium strength anaerobic pipe sealant. Thixotropic formulation reduces run-off and migration of the product before assembly. It can be easily applied to threaded joints and removed easily with hand tools. With its specialized formulation, Pipe Sealant 543 can be used applications where high-pressure proof or oil resistance is required. The product resists very high pressures, after full curing.

Main constituent	:	Methacrylate ester
Appearance (uncured)	:	Liquid
Colour	:	Blue
Viscosity	:	Medium and thixotropic
Strength	:	Medium

☑ Approvals and certificates



WRAS (Water Regulations Advisory Scheme)
Related standard: BS 6920
Licence number: 2305558



NSF Non-food Compound Listing
Category Code: S2
Approval No.: 172974



DVGW (German Gas Institution)
Related standard: DIN EN 751-1
Licence number: NG-5146DM0479

📏 Physical properties of uncured adhesive

Specific gravity	:	1.03
Conditions: 22°C		
Flash point	:	111°C
Method: ASTM D56-05		
Temperature range	:	-50°C to 150°C
Corrosivity	:	Non-corrosive

Gap filling	:	up to 0.20mm
Viscosity		
Conditions: 22°C		
Method: ISO 2555	:	6000 – 12000 cPs (@10 rpm)
Apparatus: Brookfield RVT, spindle 3		

🔒 Typical curing performance of adhesive

○ Curing time at room conditions

Various type of curing time of adhesive on several substrates are given as follows. Note that results can differ due to distance of bond gap and temperature.

Specimens	:	M10x25 bolt and proper nut
Conditions	:	22°C

Handling time

Material of specimen	Duration
Brass	<30 secs
Steel	2 to 4 mins
Stainless steel	3 to 6 mins
Zinc plated steel	15 to 30 mins
Aluminium	20 to 35 mins


Average functional curing time: 1 to 3 hours

Average full curing time: 8 to 12 hours

○ Curing speed with different substrates

The curing rate of anaerobic adhesive greatly depends on type of surface material, substrate. The curing rate developed in time is determined by measuring breakaway torque of bolt and nut specimens. Test details and resultant graphs are given below.

Test method	:	ISO 10964
Bolt and nut specs.	:	M10x25
Conditions	:	22°C

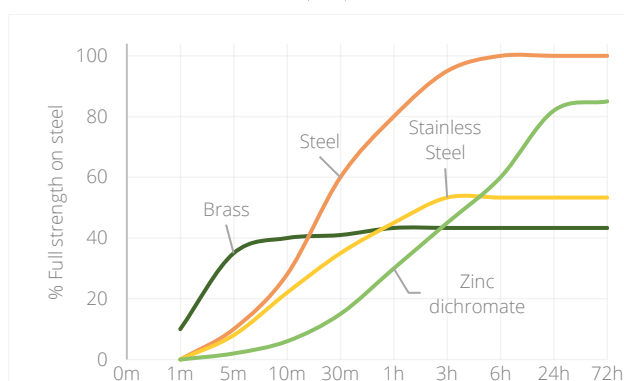


○ Curing speed at different temperatures

TDS

Guarri Pipe Sealant 543

Temperature of medium has great impact on curing performance of anaerobic adhesive. The curing rate developed in time is determined by measuring breakaway torque of bolt and nut specimens. Test details and resultant graphs are given below.


Test method	:	ISO 10964
Bolt and nut specs.	:	M10x25
Conditions	:	22°C

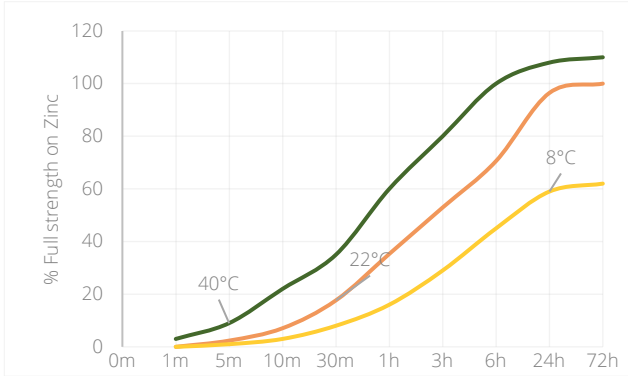

o Curing speed with different bond gaps

Distance between two surfaces can significantly effect curing rate of adhesive. The curing rate developed in time is determined by measuring shear stress on the one surface of the specimen. Test details and resultant graphs are given below.

Test method	:	ISO 10123
Conditions	:	22°C

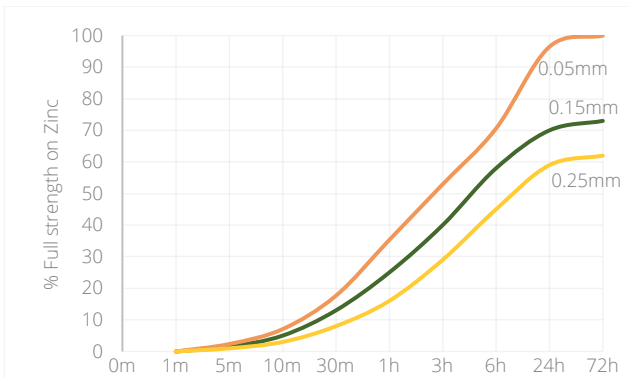

Typical properties of cured adhesive

Coefficient of thermal expansion (α) Method: ISO 11359-2	:	$4 \times 10^{-7} \text{ K}^{-1}$
Coefficient of thermal conductivity (k) Method: ISO 8302	:	0.34 W/(m.K)
Specific heat Method: ISO 11357-4	:	0.21 kJ/(kg.K)

Performance of cured anaerobic adhesive is examined and resultant torque values are given below.

Test method	:	ISO 10964
Conditions	:	22°C
Specimens	:	Different type of nuts and bolts

Unseated assembly cured for 24 hours

Type of specimen	Breakaway Torque (T_{BA})	Prevailing Torque (T_p)
Zinc plated, M10	15 N.m	3 N.m
Stainless steel, M10	12 N.m	2 N.m
Steel, M10	17 N.m	4 N.m



Environmental resistance of cured adhesive

Environmental resistance of cured adhesive is measured after curing by applying ISO 10964 preloaded assembly test at different conditions.

Test method	:	ISO 10964
Bolt and nut specs.	:	Zinc plated, M10x25
Curing condition and duration	:	22°C, 1 week
Torque test conditions (exception is hot strength test)	:	22°C
Torque type	:	Breakloose Torque (T_{Bl})


Typical cured performance of adhesive

TDS

Guarri Pipe Sealant 543


o Hot strength

Strength is examined at various temperatures. The reference value of '% Full strength on zinc plated' is taken from previous tables corresponding 24 hours curing.

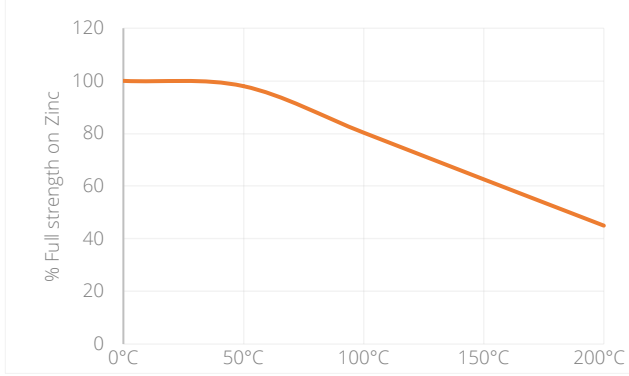

o Heat aging

Strength is examined on specimens that are aged at different temperatures. The reference value of '% Full strength on zinc plated' is taken from previous tables corresponding 24 hours curing.

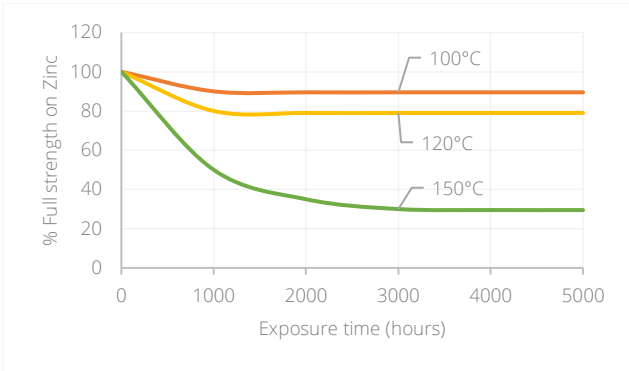

☰ Directions for use

- Clean male and female threads before assembly with an absorbent tissue paper to remove any cutting oil.
- Apply the adhesive with a 360 turn to leading threads of the male and female fittings.
- Use an absorbent tissue paper to wipe off excess jointing compound in the direction of the thread.
- Assembly parts and hold on for 24 hours at 22-24°C to ensure full curing of jointing compound.
- For disassembly, use hand tools to remove mating parts. When it is hard to disassemble at room temperature, apply local heat until reaching 250°C and disassemble while hot. Then, remove any residual cured adhesive mechanically and clean parts with a proper solvent, acetone.



Packaging

Bottles: 15ml, 50ml, 100ml, 125ml and 250ml
Bulk: 3L, 10L and 15L



Storage and shelf life

Keep product in its original container at 22°C and avoid to contact with direct sunlight. Storage below 5°C and above 30°C can negatively affect product properties.

Material removed from its original container can be contaminated during usage which affects both adhesive performance and storage life. Therefore, do not return contaminated product to the original container.

Guarri cannot take any responsibility for product which has been contaminated or stored under conditions different than previously indicated.

Shelf life: 36 months at 22°C



Health and safety

The product contains methacrylate esters.

For further information, please consult Safety Data Sheet (SDS) before use.



Disclaimer

The data contained herein are furnished for informational purposes only and are believed to be reliable. However, Guarri does not assume responsibility for any results obtained by persons over whose methods Guarri has no control. It is the user's responsibility to determine the suitability of Guarri products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Guarri products. Guarri specifically disclaims all warranties express or implied, including warranties of saleability and suitability for a particular purpose arising from sale or use of Guarri products. Guarri further disclaims any liability for consequential or incremental damages of any kind including lost profits.

Atlas Plast İnşaat Malz. İth. İhr. San. Ve Tic. Ltd. Şti.

Adnan Kahveci Mah. Yavuz Sultan Selim Bulvarı

Perla Vista B-Blok D:53

Beylikdüzü/İstanbul/Türkiye

Telefon: +90 532 302 88 61

www.atlasplast.com.tr